

EXPERT 550A

MORE
COMFORT
SPEED
PRECISION
REACH



Cushion handle:
less vibration

Primpat
striking module inside

Light impact all-around
striking cap




Short casting for
closer end-wall reach

Capacity 110 L

Bi-direction
adjustable base
3/8" to 3/4" (10 to 19mm)

PNEUMATIC, 18GA NAILS

For the installation of Tongue & Groove hardwood flooring



3/4" (19mm) factory set
Adjustable for 3/8" to 3/4" (10 to 19mm)



Primpat
Powered
Enduring Service
1.25M
cycle valve

Primpat
Powered

Warranty

7 years on cast
1 year on parts
(excluding wear parts)

Weight : 8,75 lbs (3,96kg)
Height : 17 3/4" (451mm)
Length : 14,5" (368 mm)
Width : 5,25" (133mm)



550 AL


Cleats L

18ga

1 3/4" / 45mm
1 1/2" / 38mm
1 1/4" / 32mm



Solid
(Domestic & Exotic)

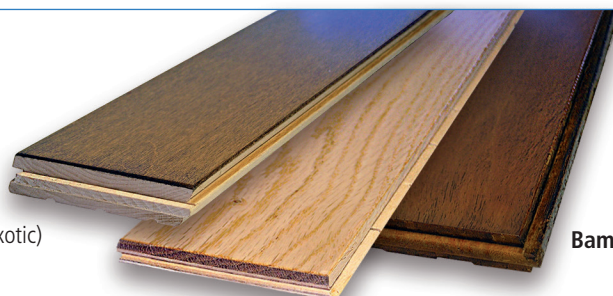

Bamboo

Engineered

Capacity

- 110 L nails

Operating pressure

80-110 psi (5,5 -7,6 bar)

Lubrication

A few drops of a non-detergent
oil weekly

Thread fitting type

3/8" (9,65mm) NPT

Factory set

3/4" (19mm) flooring

Applications

3/8" to 3/4" (10 to 19mm)
flooring

Wood

Solid, Engineered,
Domestic or Exotic

Accessories

- 3" (78mm) rotating
extension handle (A800)
- **PrimSurfer**
Click-on Roller base add-on kit (A866)